


MK 88

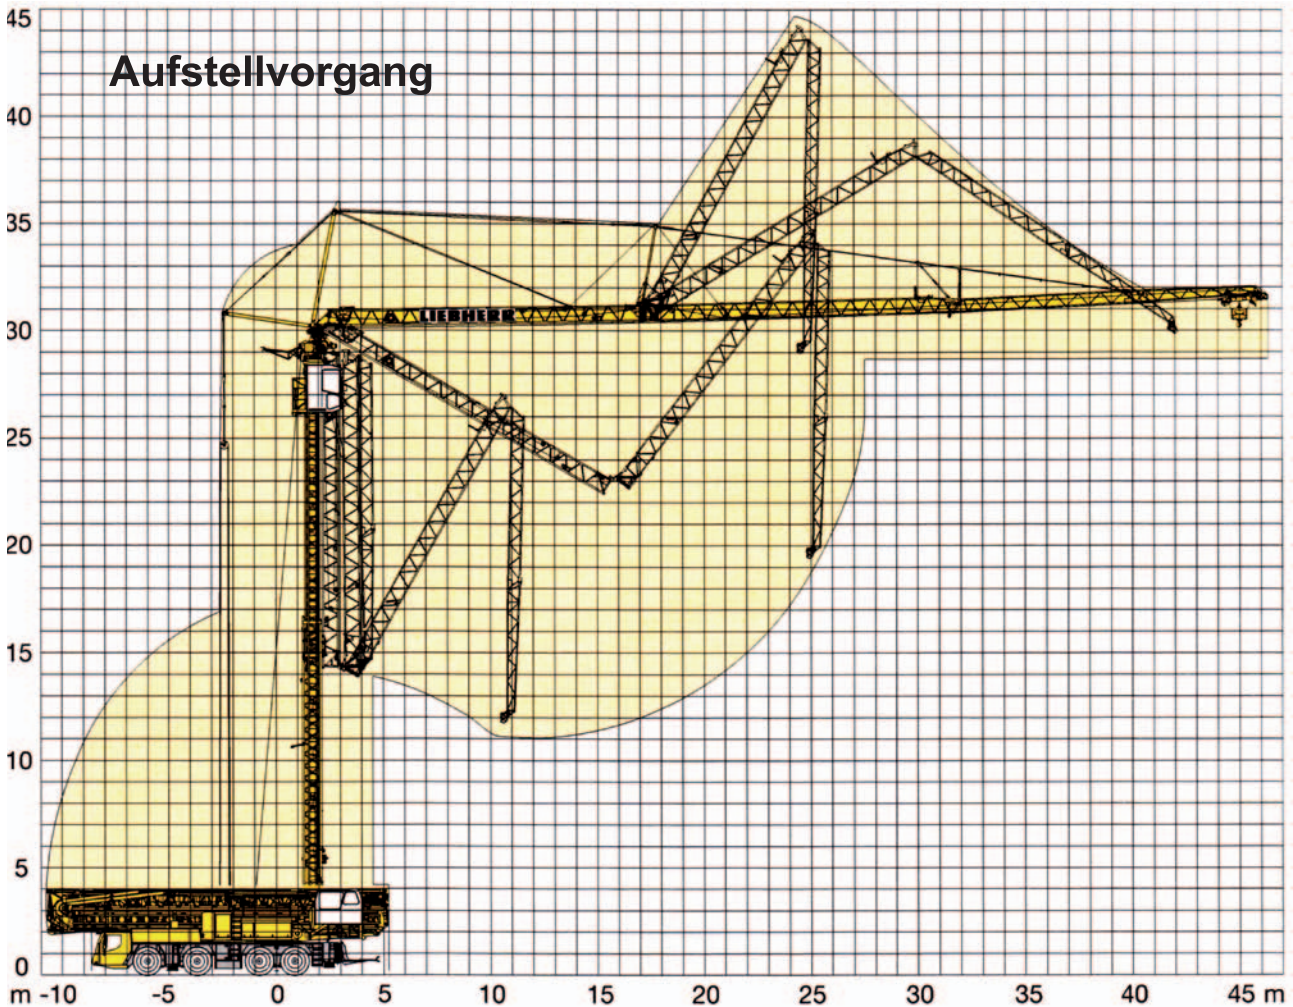

Ausleger horizontal mit 2,0 t Zusatzballast

| 7,30 m x 7,00 m | | | | m / kg | | | | | | | | | | | | | | | | | |
|-----------------|-----------------------------|--------|--------------------|--------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | m | m / kg | | 12,0 | 14,0 | 16,0 | 18,0 | 20,0 | 22,0 | 24,0 | 26,0 | 28,0 | 30,0 | 32,0 | 34,0 | 36,0 | 38,0 | 40,0 | 42,0 | 44,0 | 45,0 |
| | max. 6,5 Bft (14 m/sec.) | 45,0 | 3,3 - 12,0 8000 | 8000 | 6900 | 6070 | 5410 | 4870 | 4420 | 4050 | 3730 | 3450 | 3210 | 2990 | 2800 | 2630 | 2480 | 2340 | 2220 | 2100 | 2050 |
| | max. 8,0 Bft (20 m/sec.) | 45,0 | 3,3 - 11,0 8000 | 7370 | 6360 | 5580 | 4960 | 4460 | 4050 | 3700 | 3400 | 3140 | 2920 | 2720 | 2540 | 2390 | 2250 | 2120 | 2000 | 1900 | 1850 |

| 7,30 m x 5,75 m | | | | m / kg | | | | | | | | | | | | | | | | | |
|-----------------|-----------------------------|--------|--------------------|--------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | m | m / kg | | 12,0 | 14,0 | 16,0 | 18,0 | 20,0 | 22,0 | 24,0 | 26,0 | 28,0 | 30,0 | 32,0 | 34,0 | 36,0 | 38,0 | 40,0 | 42,0 | 44,0 | 45,0 |
| | max. 6,5 Bft (14 m/sec.) | 45,0 | 3,3 - 10,5 8000 | 6930 | 5870 | 5080 | 4470 | 3980 | 3580 | 3250 | 2970 | 2730 | 2520 | 2340 | 2180 | 2030 | 1910 | 1790 | 1690 | 1590 | 1550 |
| | max. 8,0 Bft (20 m/sec.) | 45,0 | 3,3 - 9,5 8000 | 6310 | 5380 | 4680 | 4130 | 3690 | 3320 | 3020 | 2760 | 2540 | 2350 | 2180 | 2030 | 1900 | 1780 | 1680 | 1580 | 1490 | 1450 |

Außer Betrieb keine Demontage notwendig.

Auslegerstellungen mit 2,0 t Zusatzballast

| 7,30 m x 7,00 m | | | | 15° | | | | | | | | 45° | | | | | | | |
|-----------------|-----------------------------|------|--|-------------|--|--|--|--|--|--|--|--------------|--|--|--|----|--|--|--|
| | m | | | kg | | | | | | | | m | | | | kg | | | |
| | max. 6,5 Bft (14 m/sec.) | 45,0 | | 3,2 - 40,0 | | | | | | | | 1850 | | | | | | | |
| | | | | 40,0 - 43,3 | | | | | | | | 1850 - 1700* | | | | | | | |
| | max. 8,0 Bft (20 m/sec.) | 45,0 | | 3,2 - 35,0 | | | | | | | | 1850 | | | | | | | |
| | | | | 35,0 - 43,3 | | | | | | | | 1850 - 1400* | | | | | | | |

| 7,30 m x 7,00 m | | | | 30° | | | | | | | | | | | | | | | |
|-----------------|-----------------------------|--------|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | m | m / kg | | 8,0 | 10,0 | 12,0 | 14,0 | 16,0 | 18,0 | 20,0 | 22,0 | 24,0 | 26,0 | 28,0 | 30,0 | 32,0 | 34,0 | 36,0 | 38,9 |
| | max. 6,5 Bft (14 m/sec.) | 45,0 | 3,0 - 11,0 6000 | 6000 | 6000 | 5650 | 5050 | 4560 | 4150 | 3810 | 3510 | 3250 | 3030 | 2830 | 2650 | 2490 | 2350 | 2220 | 2050 |
| | max. 8,0 Bft (20 m/sec.) | 45,0 | 3,0 - 9,0 6000 | 6000 | 5620 | 4970 | 4450 | 4020 | 3660 | 3360 | 3100 | 2870 | 2670 | 2490 | 2340 | 2200 | 2070 | 1950 | 1800 |